

250 Alaskan HT



HEWESCRAFT 250 ALASKAN HT TEST DATE 6/20/18

| | |
|--------------------------------|-----------|
| Length | 25'7" |
| Beam | 102" |
| Dry Weight (Boat Only) | 4,600 lbs |
| Maximum HP | 400 |
| Fuel Capacity | 190 |
| Weight as tested (Approximate) | 5,625 lbs |

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F150XB / LF150XB

| | |
|---------------------|-------------|
| Horsepower | Twin 150 HP |
| Displacement | 163 CID |
| Dry Weight (Engine) | 489 lbs |
| Gear Ratio | 2:1 |
| Mounting Height | #2 |


PROPELLERS

| | |
|-----------------|-----------------------------------|
| Material/Blades | SS/3 |
| Series | Painted SS |
| Diameter/Pitch | 14 1/4 x 17 |
| Yamaha Part # | 68F-45972-00-00 / 68G-45972-00-00 |

TEST CONDITIONS

| | |
|------------------------------|-----------|
| Number of People | 5 |
| Air Temperature (Fahrenheit) | 82 ° F |
| Elevation | 1,300 ft. |
| Wind Velocity | 0-5 mph |

| RPM | MPH | GPH | MPG |
|------|-------|-------|------|
| 1000 | 5.25 | 1.40 | 3.75 |
| 1500 | 6.25 | 2.40 | 2.60 |
| 2000 | 8.60 | 3.90 | 2.21 |
| 2500 | 10.65 | 5.80 | 1.84 |
| 3000 | 16.25 | 8.40 | 1.93 |
| 3500 | 22.10 | 10.60 | 2.08 |
| 4000 | 27.25 | 12.40 | 2.20 |
| 4500 | 32.30 | 15.50 | 2.08 |
| 5000 | 36.75 | 18.60 | 1.98 |
| 5500 | 40.20 | 25.20 | 1.60 |
| 6000 | 45.05 | 31.20 | 1.44 |
| 6100 | 45.2 | 31.4 | 1.44 |

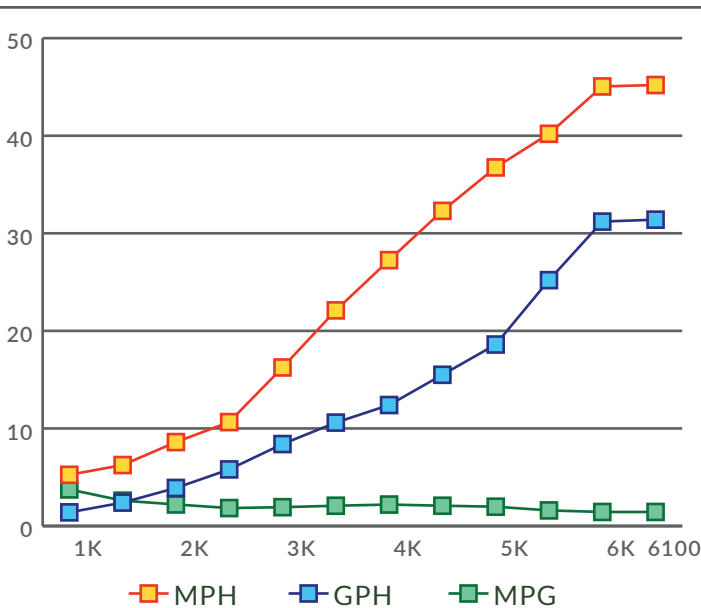

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

250 Alaskan HT



HEWESCRAFT 250 ALASKAN HT TEST DATE 1/16/19

| | |
|--------------------------------|-----------|
| Length | 25'7" |
| Beam | 102" |
| Dry Weight (Boat Only) | 4600 lbs |
| Maximum HP | 450 |
| Fuel Capacity | 190 |
| Weight as tested (Approximate) | 5,867 lbs |

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

SUZUKI 300

| | |
|---------------------|-----------|
| Horsepower | 300 HP |
| Displacement | 245.6 CID |
| Dry Weight (Engine) | 660 lbs |
| Gear Ratio | 2.08:1 |
| Mounting Height | #2 |


PROPELLERS

| | |
|-----------------|-----------------|
| Material/Blades | SS/3 |
| Series | Water Grip |
| Diameter/Pitch | 16x17 |
| Suzuki Part # | 990C0-00810-17P |

TEST CONDITIONS

| | |
|------------------------------|-----------|
| Number of People | 5 |
| Air Temperature (Fahrenheit) | 35 ° F |
| Elevation | 1,300 ft. |
| Wind Velocity | 0-5 mph |

| RPM | MPH | GPH | MPG |
|------|------|------|------|
| 1000 | 4.5 | 1.0 | 4.5 |
| 1500 | 6.5 | 1.7 | 3.82 |
| 2000 | 8.0 | 2.7 | 3.02 |
| 2500 | 9.0 | 4.4 | 2.05 |
| 3000 | 11.5 | 6.3 | 1.84 |
| 3500 | 15.5 | 8.0 | 1.94 |
| 4000 | 23.0 | 10.2 | 2.27 |
| 4500 | 28.5 | 13.6 | 2.10 |
| 5000 | 34.5 | 16.3 | 2.12 |
| 5500 | 38.0 | 19.0 | 2.00 |
| 6000 | 41.5 | 26.0 | 1.60 |

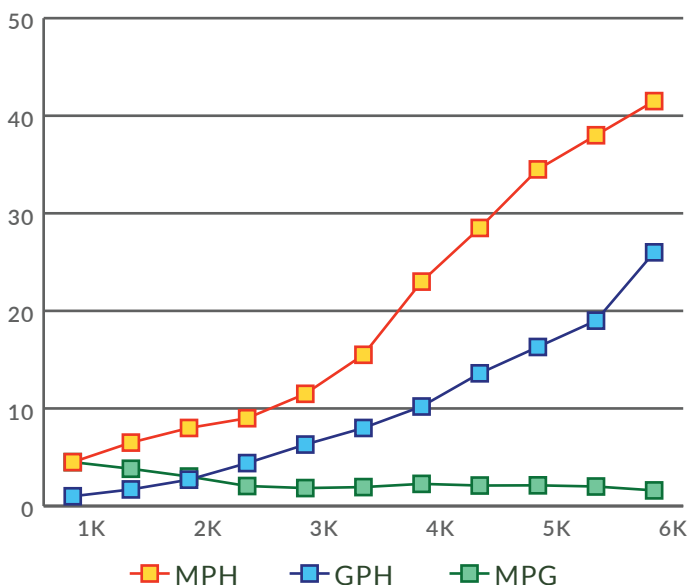

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

250 Alaskan HT



HEWESCRAFT 250 ALASKAN HT TEST DATE 12/20/18

| | |
|--------------------------------|-----------|
| Length | 27'7" |
| Beam | 102" |
| Dry Weight (Boat Only) | 4,600 lbs |
| Maximum HP | 450 |
| Fuel Capacity | 190 |
| Weight as tested (Approximate) | 5,867 lbs |

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F425

| | |
|---------------------|----------|
| Horsepower | 425 HP |
| Displacement | 5,559 CC |
| Dry Weight (Engine) | 668 lbs |
| Gear Ratio | 1.79:1 |
| Mounting Height | #2 |


PROPELLERS

| | |
|-----------------|-----------------|
| Material/Blades | SS/3 |
| Series | XTO |
| Diameter/Pitch | 16 5/8x19 |
| Yamaha Part # | 6GR-45974-00-00 |

TEST CONDITIONS

| | |
|------------------------------|-----------|
| Number of People | 5 |
| Air Temperature (Fahrenheit) | 35 ° F |
| Elevation | 1,300 ft. |
| Wind Velocity | 0-5 mph |

| RPM | MPH | GPH | MPG |
|------|-------|-------|------|
| 500 | 3.75 | 1 | 3.75 |
| 1000 | 7.5 | 2 | 3.75 |
| 1500 | 8.5 | 2.8 | 3.04 |
| 2000 | 9.5 | 4.5 | 2.11 |
| 2500 | 14.5 | 6.3 | 2.30 |
| 3000 | 20.25 | 8.4 | 2.41 |
| 3500 | 28.5 | 11.1 | 2.57 |
| 4000 | 34.5 | 14.4 | 2.40 |
| 4500 | 40.0 | 17.75 | 2.25 |
| 5000 | 43.5 | 23.25 | 1.87 |
| 5500 | 48.0 | 28.0 | 1.71 |
| 6000 | 53.0 | 36.75 | 1.44 |

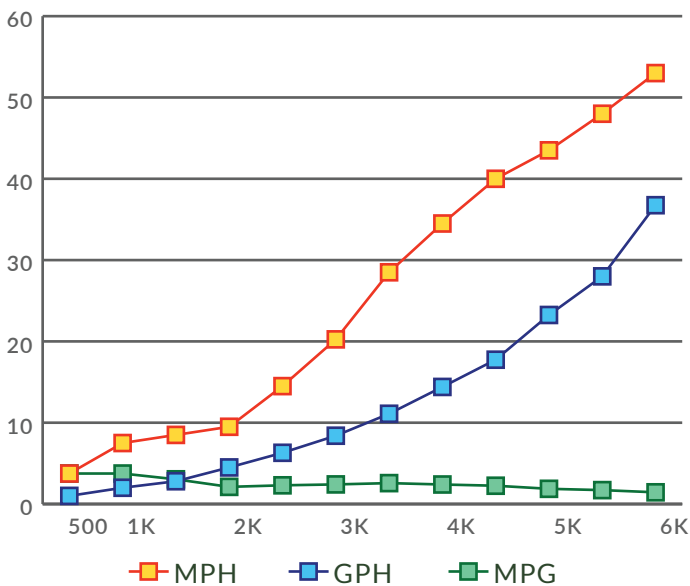

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

270 Alaskan HT



HEWESCRAFT 270 ALASKAN HT TEST DATE 9/16/22

| | |
|--------------------------------|-----------|
| Length | 27'7" |
| Beam | 102" |
| Dry Weight (Boat Only) | 5,200lbs |
| Maximum HP | 500 |
| Fuel Capacity | 190 |
| Weight as tested (Approximate) | 6,020 lbs |

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

MERCURY TWIN 225

| | |
|---------------------|-------------|
| Horsepower | 225 Twin HP |
| Displacement | 209 CID |
| Dry Weight (Engine) | 475 lbs |
| Gear Ratio | 1.85:1 |
| Mounting Height | #1 |


PROPELLERS

| | |
|-----------------|-----------|
| Material/Blades | SS/3 |
| Series | SS |
| Diameter/Pitch | 14 3/4x17 |
| Mercury Part # | N/A |

TEST CONDITIONS

| | |
|------------------------------|-----------|
| Number of People | 4 |
| Air Temperature (Fahrenheit) | 65 ° F |
| Elevation | 1,260 ft. |
| Wind Velocity | 0-5 mph |

| RPM | MPH | GPH | MPG |
|------|------|------|-----|
| 1500 | 8.15 | 3.0 | 2.7 |
| 2000 | 10.1 | 4.9 | 2.1 |
| 2500 | 14.4 | 6.1 | 2.4 |
| 3000 | 19.5 | 7.7 | 2.5 |
| 3500 | 26.4 | 11.0 | 2.4 |
| 4000 | 32.0 | 13.5 | 2.4 |
| 4500 | 37.0 | 18.1 | 2.0 |
| 5000 | 40.9 | 21.4 | 1.9 |
| 5500 | 45.1 | 30.7 | 1.5 |
| 6000 | 49.1 | 36.7 | 1.3 |

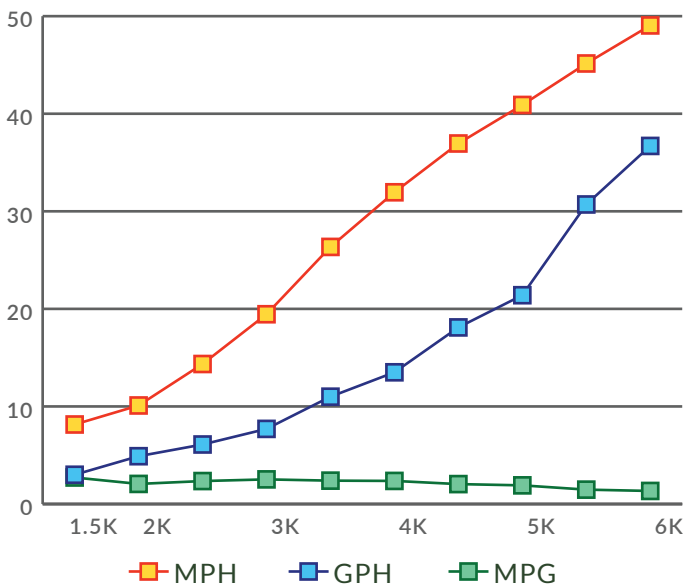

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

270 Alaskan HT



HEWESCRAFT 270 ALASKAN HT TEST DATE 5/19/18

| | |
|--------------------------------|-----------|
| Length | 27'7" |
| Beam | 102" |
| Dry Weight (Boat Only) | 5,200lbs |
| Maximum HP | 500 |
| Fuel Capacity | 190 |
| Weight as tested (Approximate) | 6,020 lbs |

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F150XB / LF150XB

| | |
|---------------------|-------------|
| Horsepower | 150 Twin HP |
| Displacement | 163 CID |
| Dry Weight (Engine) | 489 lbs |
| Gear Ratio | 2:1 |
| Mounting Height | #2 |

PROPELLERS

| | |
|-----------------|-----------------------------------|
| Material/Blades | SS/3 |
| Series | Painted SS |
| Diameter/Pitch | 14 1/4x17 |
| Yamaha Part # | 68F-45972-00-00 / 68G-45972-00-00 |


TEST CONDITIONS

| | |
|------------------------------|-----------|
| Number of People | 4 |
| Air Temperature (Fahrenheit) | 52 ° F |
| Elevation | 1,300 ft. |
| Wind Velocity | 0-5 mph |

| RPM | MPH | GPH | MPG |
|------|-----|-------|-----|
| 1000 | 3 | 1.3 | 2.3 |
| 1500 | 6 | 2.73 | 2.2 |
| 2000 | 8 | 3.48 | 2.3 |
| 2500 | 12 | 5.22 | 2.3 |
| 3000 | 16 | 6.67 | 2.4 |
| 3500 | 22 | 9.17 | 2.4 |
| 4000 | 27 | 11.25 | 2.4 |
| 4500 | 31 | 14.1 | 2.2 |
| 5000 | 35 | 19.44 | 1.8 |
| 5500 | 38 | 25.33 | 1.5 |
| 6000 | 42 | 32.3 | 1.3 |



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

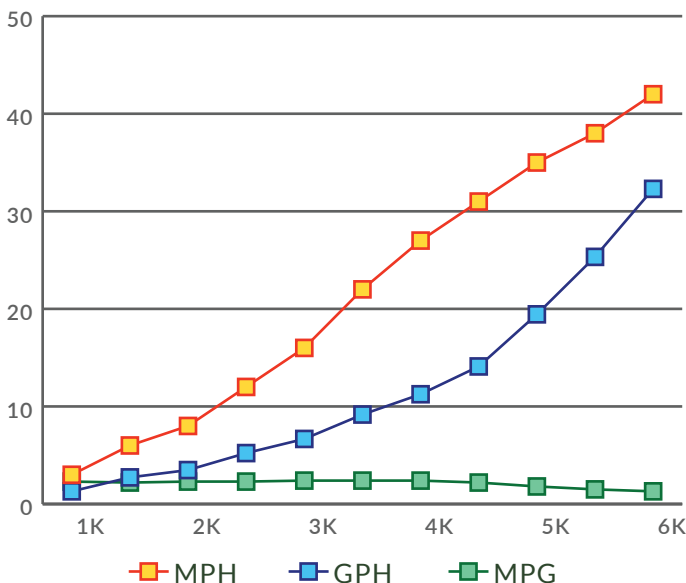

270 Alaskan HT



HEWESCRAFT 270 ALASKAN HT TEST DATE 6/12/19

| | |
|--------------------------------|----------|
| Length | 27'7" |
| Beam | 102" |
| Dry Weight (Boat Only) | 5,200lbs |
| Maximum HP | 500 |
| Fuel Capacity | 190 |
| Weight as tested (Approximate) | 8623 lbs |

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F200XCA / 200XCA

| | |
|---------------------|-------------|
| Horsepower | 200 Twin HP |
| Displacement | 2.8 L |
| Dry Weight (Engine) | 489 lbs |
| Gear Ratio | 1.86:1 |
| Mounting Height | #2 |


PROPELLERS

| | |
|-----------------|-----------------------------------|
| Material/Blades | SS/3 |
| Series | Reliance Series |
| Diameter/Pitch | 14 1/4x15 |
| Yamaha Part # | 68F-45972-10-00 / 68G-45972-10-00 |

TEST CONDITIONS

| | |
|------------------------------|-----------|
| Number of People | 4 |
| Air Temperature (Fahrenheit) | 60° F |
| Elevation | 1,300 ft. |
| Wind Velocity | 0-5 mph |

| RPM | MPH | GPH | MPG |
|------|-----|------|------|
| 1000 | 6 | 1.6 | 3.75 |
| 1500 | 7 | 2.6 | 2.69 |
| 2000 | 9 | 4.0 | 2.25 |
| 2500 | 11 | 5.7 | 1.93 |
| 3000 | 15 | 7.6 | 1.97 |
| 3500 | 22 | 9.5 | 2.32 |
| 4000 | 28 | 12.4 | 2.26 |
| 4500 | 32 | 14.8 | 2.16 |
| 5000 | 36 | 18.4 | 1.96 |
| 5500 | 41 | 24 | 1.71 |
| 6100 | 45 | 35 | 1.29 |

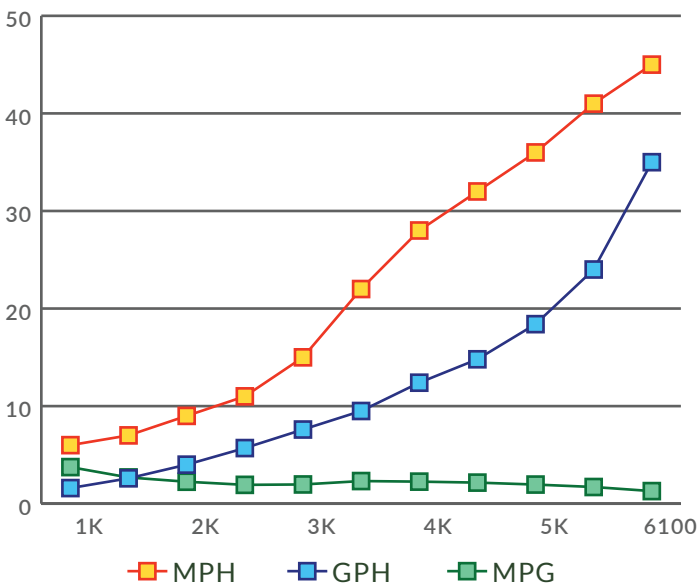

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.